



## D9mm 635nm Red DOE Laser Diffuser Module

### Application


Industrial Areas / entertainment / Sport

### Property

Wavelength Range = 635nm

### Introduction

We created high stability and quality red laser diffuser modules that are successfully applied in industry, entertainment, sport field, etc. LM 635nm laser module series are well recognized by its good quality, high MTTF, good stability and reliability, it also can be custom made as requirements.

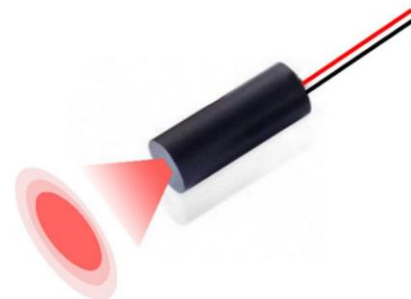

### Specifications(T=25°C)

Items	Symbols	LM9R635H10P4
Mode		CW (Continuous Wave)
Wavelength	$\lambda$	635nm
Lens		DOE#4
Laser Pattern	P	Diffuser
Span angle	$\emptyset$	1°
Pattern Diameter		~16mm at 1m
Diameter x Length	$\Phi \times L$	9x25 mm
Output Power	Po	<5mW
Power Stability		<10%
Divergence Angle	mrad	<2
Operating Voltage(DC)	Vo	3V / 5V
CW Operating Current	Io	30mA (typ), 60mA (max)
Operating Temperature	To	-10°C ~ +40°C
Storage Temperature	Ts	-20°C ~ +80°C
Housing Material		Anodized Aluminum
Mean time to failure		>8000 hrs




ATTENTION – Observe Precautions for Handling – Electrostatic Sensitive Device




## Outline Dimensions

UL 1571 AWG 28# RED(+) / BLACK(-) WIRE

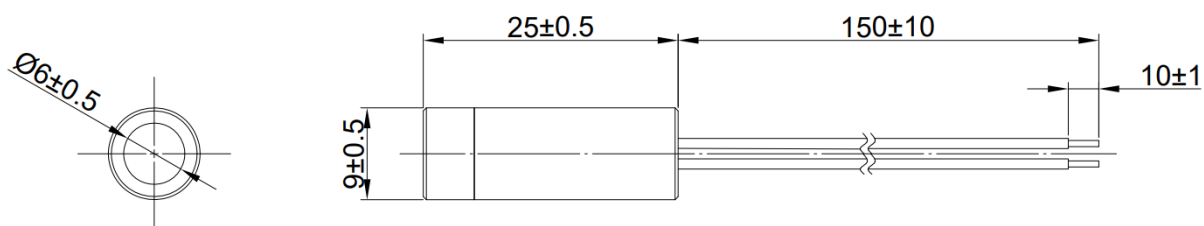

## Laser Beam example

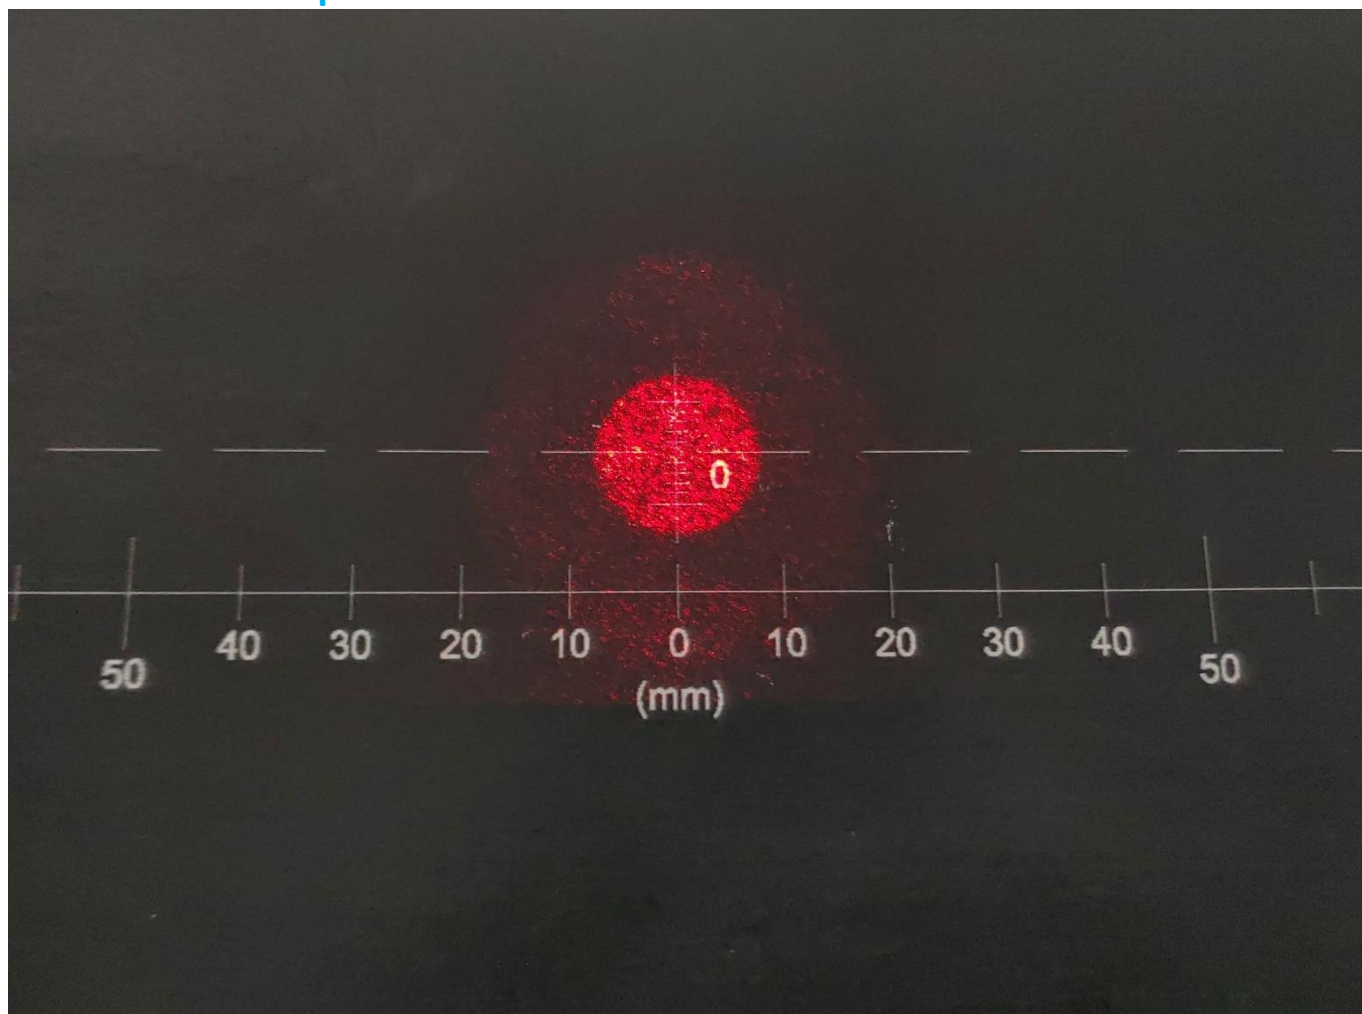

LM9R635H10P4 Beam Shape at 1m

## Power Stability

The actual output power range 4mW to 5mW for sample. Typical power will be  $4\text{mW} \pm 0.2\text{mW}$  at the  $25^\circ\text{C}$  (room temperature). i.e. the power stability represents 5%.

## Spot size



The spot size defined as Gaussian beam. In optics, a Gaussian beam is a beam of electromagnetic radiation whose transverse electric field and intensity (irradiance) distributions are well approximated by Gaussian functions. Many lasers emit beams that approximate a Gaussian profile, in which case the laser is said to be operating on the fundamental transverse mode, or "TEM00 mode" of the laser's optical resonator. When refracted by a diffraction-limited lens, a Gaussian beam is transformed into another Gaussian beam (characterized by a different set of parameters), which explains why it is a convenient, widespread model in laser optics.

### Mean time to failure (MTTF)

Mean time to failure (MTTF) is the length of time a device or other product is expected to last in operation. MTTF is one of many ways to evaluate the reliability of pieces of hardware or other technology. It's important to note, however, that the mean time to failure metrics provided by companies regarding specific products or components may not have been collected by running one unit continuously until failure. Instead, MTTF data is often collected by running many units, even many thousands of units, for a specific number of hours.

### Laser Safety

The light emitted from these devices has been set in accordance with IEC60825. However, staring into the beam, whether directly or indirectly, must be avoided.

### Class IM

The maximum permissible exposure(MPE) cannot be exceeded, it includes High-power lasers within an enclosure that prevents exposure to the radiation and that cannot be opened without shutting down the laser. For example, a continuous laser at 600nm can emit up to 0.39mW, but for shorter wavelengths, the maximum emission is lower.

### Class IIM

"Caution", visible laser light less than 1.0mW. Considered eye safe, normal exposure to this type of beam will not cause permanent damage to the retina.

### Class IIIA

"Danger", visible laser light between 1.0mW and 5.0mW. Considered eye safe with caution. Focusing of this light into the eye could cause some damage.

### Class IIIB

"Danger", infrared(IR), and high power visible lasers considered dangerous to the retina if exposed. NB: it is important to note that while complying with the above classifications, unless otherwise stated. Our laser diode products are not certified and are designed solely for use in OEM products. The way in which device is used in the final product may alter its original design classification, and it is the responsibility of the OEM to ensure compliance with the relevant standards.

Specifications are subject to change without notice.

