

VGA Small USB Camera Module GC0308

Key Properties

GC0308 Image Sensor

YUY2 Format

Frame Rate: 30fps for VGA(640(H)x480(V))

120fps for monochrome QVGA(320(H)x240(V))

M6 Lens Holder


Lenses Type -Standard: FOV(D)45° (M6 Camera Lens Module)

FOV(D)70° (M6 Camera Lens Module)

Application

Portable Media / Robot Vision Camera/ Laser Sensing

Monitoring / Security

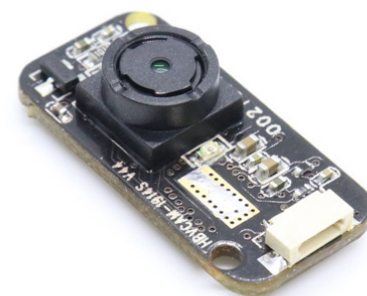

Feature

- ◆ VGA(640x480) image sensor GC0308
 - Low illumination and high dynamic range sensor
- ◆ M6 lenses
 - Standard: 45° M6 Camera Lens Module
 - 70° M6 Camera Lens Module
- ◆ High frame rate for monochrome QVGA image
- ◆ YUY2 format output support
- ◆ UVC support, plug and play for Windows and Linux



Introduction

CM03M30M5S is a VGA(640x480) USB camera board using 1/6.5" GC0308 designed for low cost and small camera device applications. CM03M120M5S is an ideal solution of small USB camera module for basic video camera or sensor monitoring function. It has S-mount (M5) lens holder for enabling the users to choose the lens and any spectral filter as per their requirements. It is a Plug-and-Play camera (UVC compliant) for Windows, Linux, Android and Mac OSX .

Specifications

Model	CM03M120M5S
Sensor	GC0308
Image Size	1/6.5 inch
Pixel Size	3.4 μm
Image Area	2176 μm x 1632 μm
Image Pixels & Resolution	VGA / 640(H) x 480(V)
Image Formats	MJPEG / YUY2 (YUYV)
Image Transfer Rate	640x480 YUY2@30fps / MJPG@30fps 320x240 YUY2@30fps / MJPG@30fps(Color) 120fps(Mono) 160x120 YUY2@30fps / MJPG@30fps
Connecting Port	USB2.0
Plug & Play	UVC(USB Video Class) Compliant support
Auto Exposure Control (AEC)	Support
Auto White Balance (AWB)	Support
Adjustable Parameters	Brightness, Contrast, Hue, Saturation, Sharpness, Gamma, Gain
Lens Parameters	Standard: 45° M6 Camera Lens Module 70° M6 Camera Lens Module
Lens Holder	Standard M5 lens holder
Power Supply	USB BUS POWER 4P-1.0mm Socket
Operating Voltage	DC 5V
Operating Current	< 120mA
Operating Temperature	-20 ~ 70°C
Storage Temperature	-20 ~ 85°C
PCBA Dimensions	12mm x 25mm
Weight	~30g
Cable Length	Standard 40cm
Operating System Request	WinXP/Win7/Win8/Win10 Linux / Android / MAC OSX

Specifications are subject to change without notice.

